


Oil Pattern Distance	42	Reverse Brush Drop	38	Oil Per Board	50 ul
Forward Oil Total	17.8 mL	Reverse Oil Total	14.25 mL	Volume Oil Total	32.05 mL
Tank Configuration	Multi Tank	Tank A Conditioner	FIRE	Tank B Conditioner	ICE

	START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	4	10	3	A	148	0.0	4.2	4.2	7400
2	9L	9R	5	14	3	A	115	4.2	14.1	9.9	5750
3	10L	10R	2	14	3	A	42	14.1	18.0	3.9	2100
4	11L	11R	1	18	3	A	19	18.0	20.5	2.5	950
5	12L	12R	1	18	3	A	17	20.5	23.0	2.5	850
6	13L	13R	1	18	3	A	15	23.0	25.5	2.5	750
7	2L	2R	0	18	3	A	0	25.5	42.0	16.5	0

	START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	26	3	B	0	42.0	36.0	-6.0	0
2	12L	12R	2	18	3	B	34	36.0	30.9	-5.1	1700
3	11L	11R	2	18	3	B	38	30.9	25.8	-5.1	1900
4	10L	10R	2	18	3	B	42	25.8	20.7	-5.1	2100
5	9L	9R	2	18	3	B	46	20.7	15.6	-5.1	2300
6	8L	8R	5	14	3	B	125	15.6	5.7	-9.9	6250
7	2L	2R	0	14	3	B	0	5.7	0.0	-5.7	0

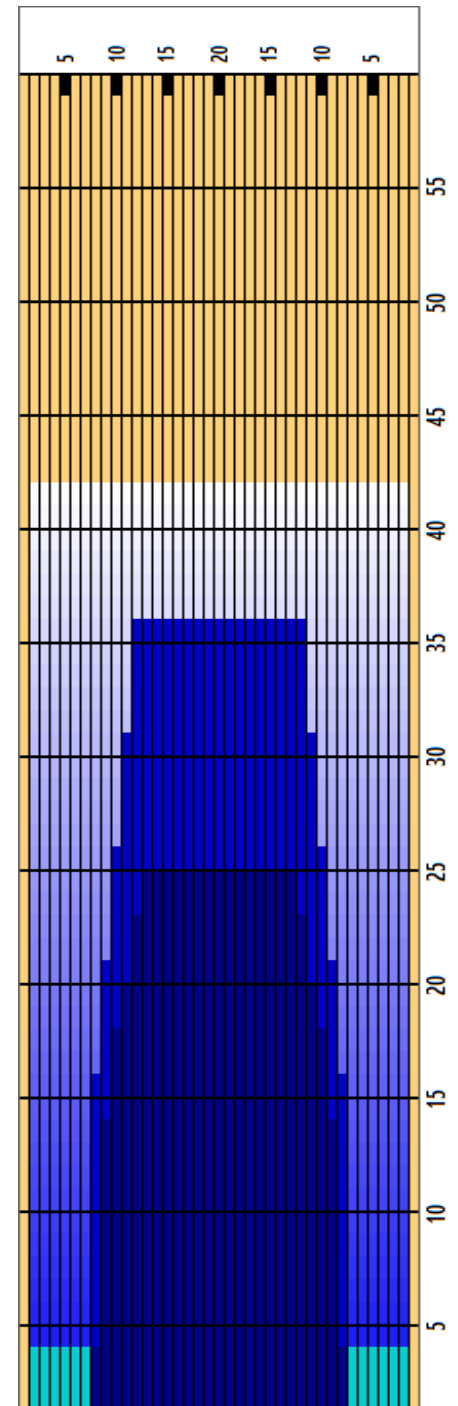

Cleaner Ratio Main Mix: NA Forward
 Cleaner Ratio Back End Mix: NA Reverse
 Cleaner Ratio Back End Distance: NA Combined
 Buffer RPM: 4 = 700 | 3 = 500 | 2 = 200 | 1 = 100



--

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside:Middle	Middle:Middle	Inside:Middle	Middle: Inside	Middle:Middle	Middle:Outside
Track Zone Ratio	6.75	1.44	1	1	1.44	6.75

